

Technical Support **01273 811011****support@paxton.co.uk**


Technical help is available: Monday - Friday from 07:00 - 19:00 (GMT)
Saturday from 09:00 - 13:00 (GMT)

Documentation on all Paxton products can be found on our website - <http://www.paxton.co.uk/>


Description of product

The Net2 Entry monitor is an audio/video monitor used to remotely communicate with visitors. It is powered using power over Ethernet (PoE) and communicates with the other elements of the system using IPv6, providing 'plug and play' installation. The only configuration required is the allocation of a monitor ID which the system uses to identify the correct monitor.

If used in conjunction with Net2 access control software, this must be version 4.25 or later.

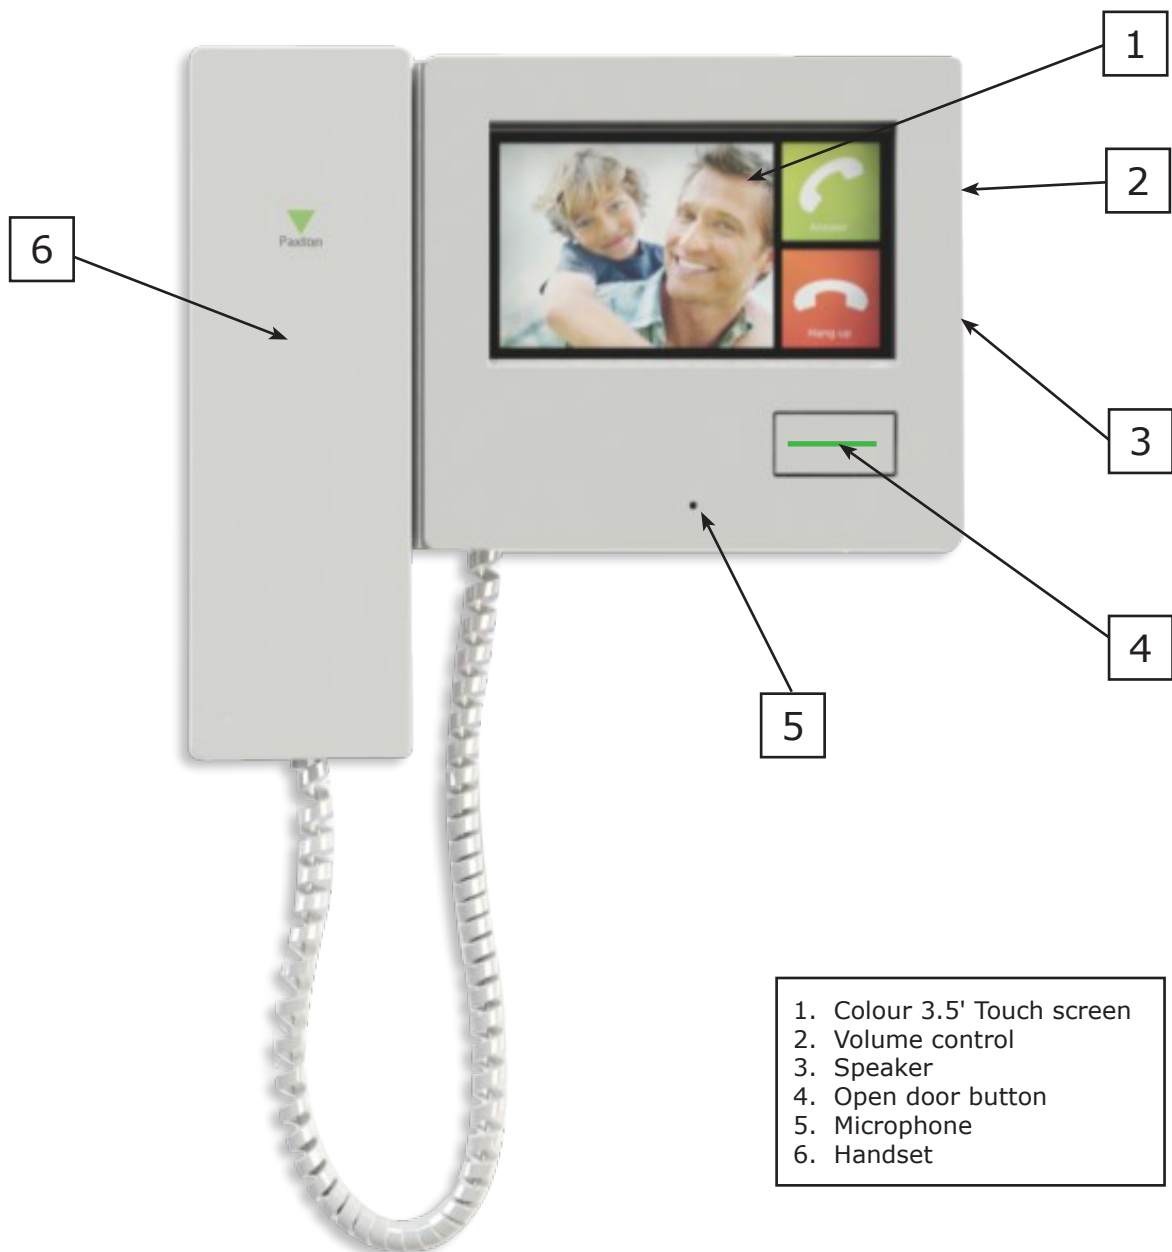

Installation

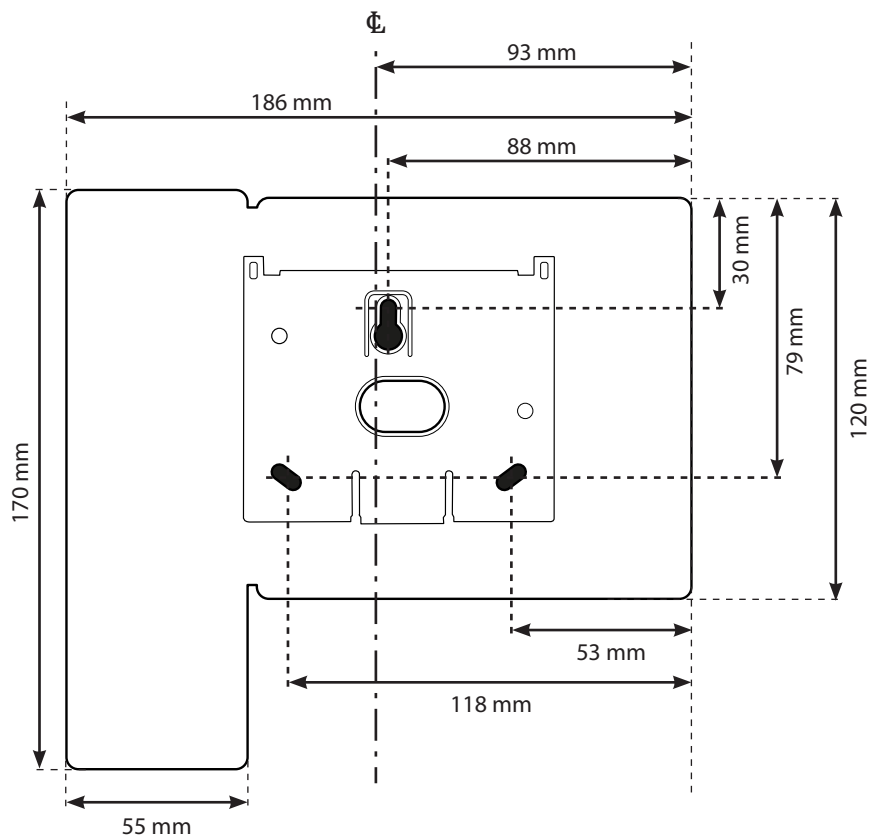

Determine where the monitor will be sited. The top right corner of the unit is regarded as the reference point for drilling and measurements. Screws and wall plugs are provided in the fitting kit.

1. Determine the position of the top mounting screw. Drill the hole and tap in one of the No 8 wall plugs.
2. Put in one of the screws, leaving a suitable gap to the wall surface and slide the bracket over it.
3. Mark the hole positions for the lower 2 screws and the network cable entry.
4. Remove the bracket and drill the additional holes.
5. Tap in the other 2 wall plugs and hang the bracket back on the top screw. Secure the bracket with the 3 screws.

Power is supplied via the network connection from a Net2 Entry controller or a network PoE switch.




A desk mount stand is also available (PN: 337-847)

A white network cable is supplied with the stand. Feed this through the mount and push it into the socket at the rear of the monitor. Clip the mount to the monitor.

See also: [AN1127 - Net2 Entry - Planning and installation](http://paxton.info/1896) < <http://paxton.info/1896> >


Paxton recommend that the network cable is run to each location and terminated in a network box. A patch cable should then be used to link the unit to the network. This makes unit replacement or removal for building maintenance much easier.

Where it is not practical to run a patch cable to the rear of the unit, it can be directly wired to the network cable via the supplied IDC module.

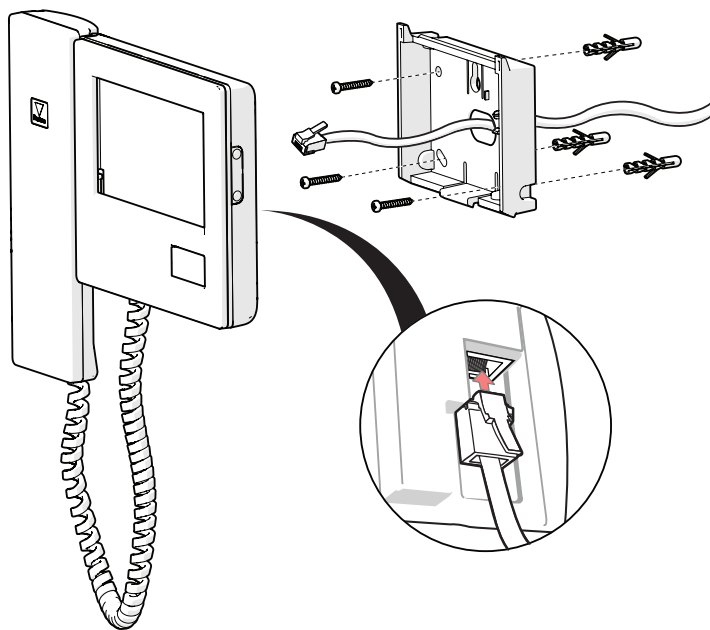

If a terminated cable is used, feed this through the bracket and push it into the socket at the rear of the monitor.


If unterminated cable is used, clip the supplied IDC module into the wall bracket. Connect the cable as per the wiring label and use the small patch lead to connect the monitor to the module.

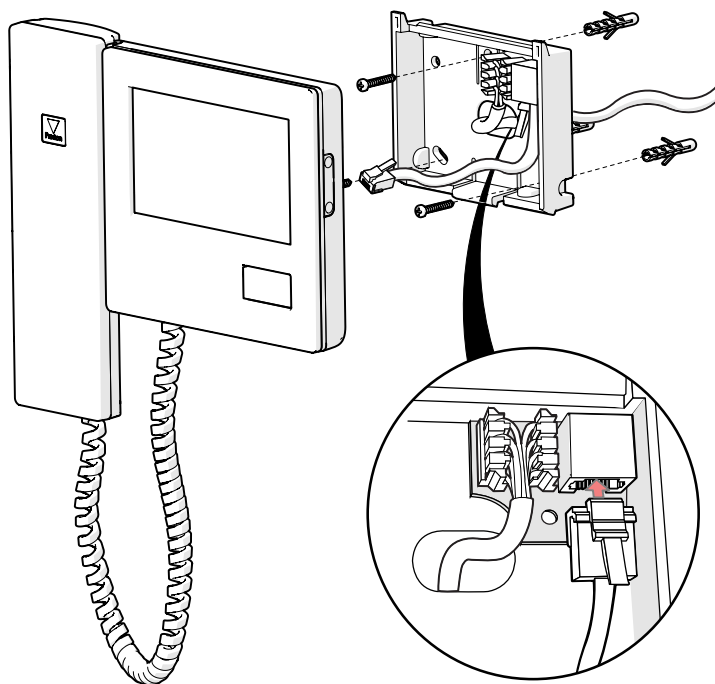

Fit the monitor to the bracket by hooking the unit onto the two top pins and push the bottom edge until it clicks.

Once PoE power is available at the unit, touch the screen to activate the menu.

Configuration

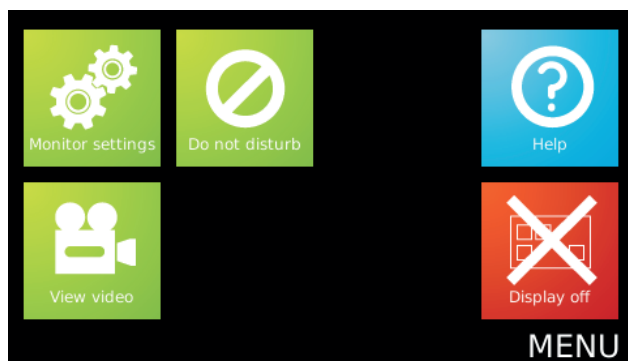

Setting the Monitor ID

When the monitor is first connected to the network it will not have a Monitor ID number.

The monitor ID is the number that a visitor will call to request entry (unless they are using a text only list) so it should relate to the location of the monitor where possible e.g. Flat Number.


1. Touch the screen to display the menu.
2. Touch the 'Monitor settings' option.

3. Touch the 'Installer settings' option.

Next, if the system has an Engineer code it must be entered.

'Language' and 'Easy read' options may be selected during the configuration process.

Touch the 'Display settings' option to change these if required. Return to the 'Settings' screen once this has been completed.

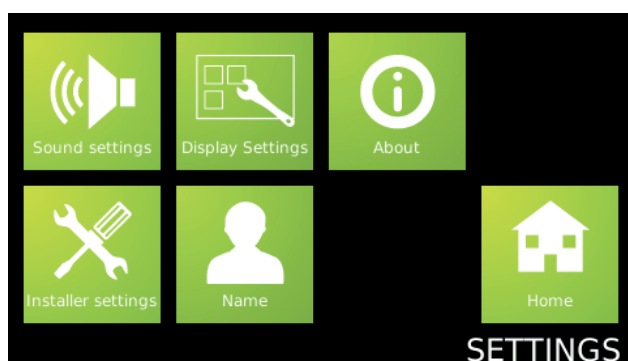


4. Touch the 'Enter monitor ID' option.




5. Enter the Monitor ID number.

Use the on-screen keypad and press 'Accept'.

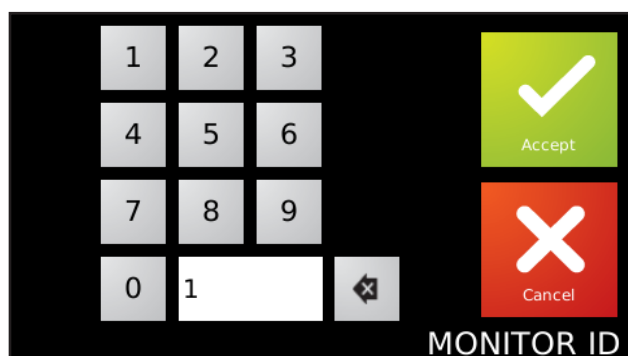

Operation - Answering a call

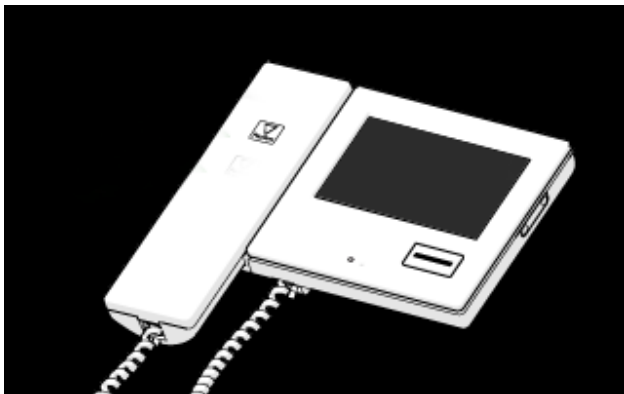

1. Default state

The monitor will normally have no display.
The button is not illuminated.



2. Incoming call

When a visitor calls a monitor, it will sound its ring tone until it is answered or it times out.

The 'open door' button will illuminate green and the video image will be displayed.



3. Answering a call

Touch the 'Answer' option to talk handsfree to the visitor or lift the handset.

You can press the 'open door' button at any time to unlock the door.

You can terminate the call at any time by touching the 'Hang up' option or replacing the handset.




4. Unlock the door

Pressing the 'open door' button will unlock the door and cause the button to flash green.

If the door has a contact switch, the door icon will show the actual position of the door. If not, a padlock icon will display the condition of the lock.

Operation - Viewing a camera

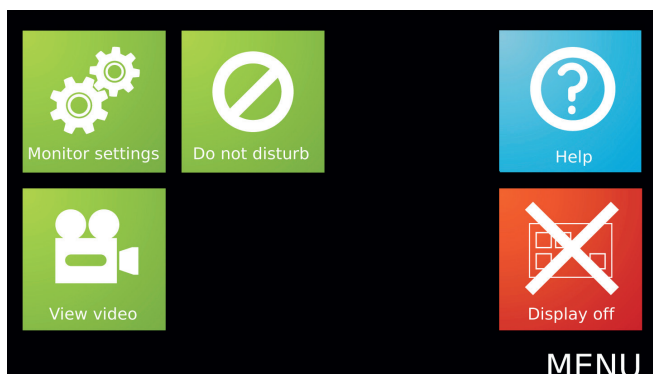

1. Select 'View video' mode

Where this function is permitted, the 'View video' option will display. This allows the camera to be used for an external view at any time.

Touch the screen to display the default menu.


Touch the 'View video' option.



2. Select the camera (if more than one)

If more than one panel is installed, this screen will display. Use the up and down arrows to select the required camera and touch 'Accept'.

Each camera may have the 'View video' option enabled/disabled. The audio and open door functions may also be enabled/disabled by the panel.

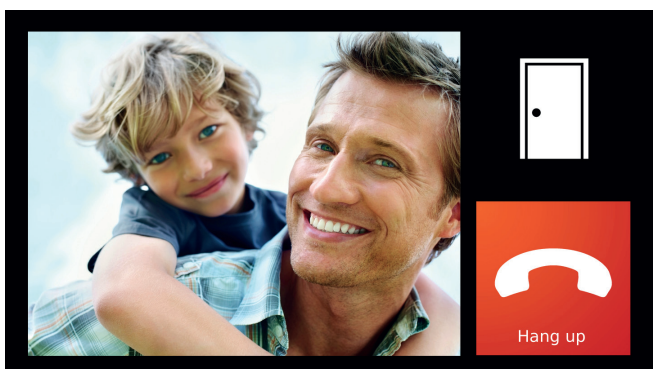

3. Viewing with the camera

The camera view will display on the monitor.

Touch the 'Hang up' option to terminate the session.

At the end of the permitted viewing time a 'Continue to view' option will display. At this point a timer must be reset or viewing will be ended.

Default Menu

If the display is blank, touching the screen will display the Menu.

Monitor settings

Displays the 'Monitor settings' menu.

Do not disturb


See 'Operation - Do not disturb mode'.

View video


Displays the 'Viewing a camera' option.

Display off

Turns off the display screen.

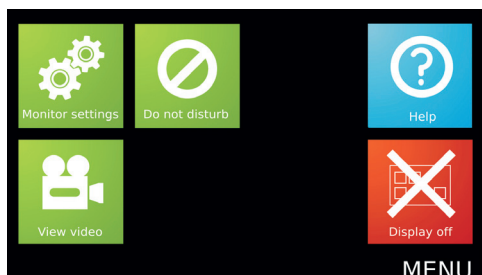

Touch 'Monitor settings' to display the menu.

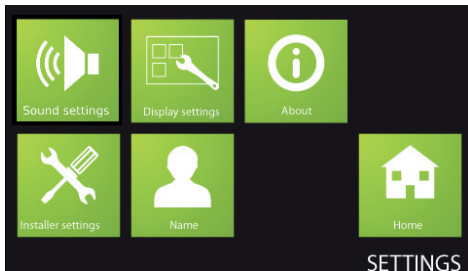

Monitor settings

Sound settings

Displays the Sound settings.

Display settings

Displays the Language, Alarm and 'Easy read' settings.

About


Displays the Software version in use on this monitor.

Installer settings

Displays the Installer settings for this monitor.

Name

Allows the user to edit the name of this monitor.
This option may be restricted in software by the installer.

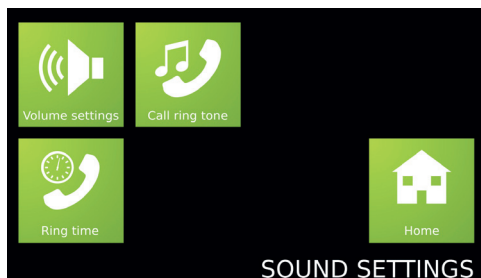

Sound Settings

Volume settings


Allows the volume of the speaker and ringtone to be adjusted.

Call ring tone

Allows a choice of ringtone.

Ring time

Sets the period the monitor will ring unless the call is answered.

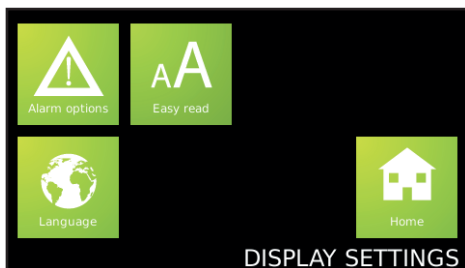

Display Settings

Alarm options


Selects if Alarms will be displayed on this Monitor.

Easy read

Displays the Easy read options.

Language

Sets the language that this monitor will display.

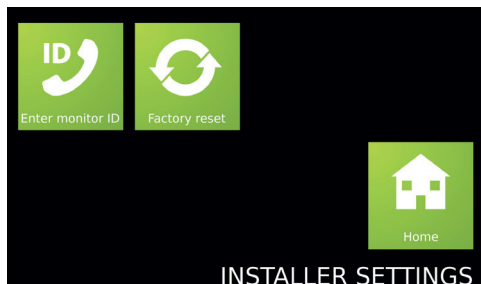

Installer Settings

Enter monitor ID

This option is used to set up the Monitor ID. See Configuration.

Factory reset

Returns the monitor settings to factory defaults.


Operation - Do not disturb mode



Visitors can be stopped from calling the monitor by putting it into 'Do not disturb' mode.


If the screen is blank, touch the screen to display the menu.

Touch the 'Do not disturb' option. The button will illuminate red.



Touch the button again to exit this mode.

Alarm display

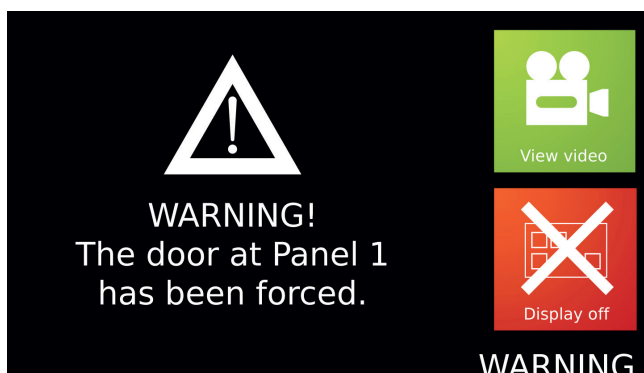

Alarm messages will display to the user at the monitor if the option has been set in the local Installer screen.

The user may view the camera to investigate the alarm.

Note: Door left open alarms will only be available if Net2 Entry is connected to a Net2 system. The Net2 system must be running v4.25 software or later.

Specifications

| Specifications | | | |
|--|-------------------|-----------------|----------------------|
| Dimensions | Width | Height | Depth |
| | 186 mm | 170 mm | 45 mm |
| Electrical | Min | Max | |
| Power over Ethernet (PoE) power rating | | 12.95W | IEEE 802.3af class 0 |
| Communication | Min | Max | |
| Ethernet bandwidth requirement | 100kb/s multicast | 1Mb/s multicast | per call in progress |
| Monitors per system | | 1000 | |
| Features | Min | Max | |
| Screen size | | | 4.3 inch colour TFT |
| Screen illumination | | | LED backlight |
| Screen resolution | | | 480x272 pixels |
| Hands free audio | | | Two way |
| Handset audio | | | Two way |
| Environment | Min | Max | |
| Operating temperature | 0 °C | 45 °C | |
| IP Rating | | | Indoor use only |
| Vandal resistance | | | Low |



Monitors should be cleaned using a clean damp cloth. Chemical cleaning products must not be used.